



1/2" CORRUGATED

Manufactured in Delta, BC



Recommended Overlap Procedure



FINISH	MATERIAL GAUGE			LENGTH
	30	26	24	
GALVALUME	•	•	•	4' to 32'
GALVANIZED	•	•	•	4' to 32'
PRE-PAINTED GALVANIZED	•	•	•	4' to 32'

STEEL:

- Galvanized and Galvalume
- Pre-painted Galvanized WeatherXL™ series (see Vicwest standard colors).



MATERIAL SPECIFICATIONS:

The steel used to manufacture CORRUGATED sheet meets the following specifications:

- ASTM A792 Grade 33 (latest revision) with designation AZ50 (AZM150) for Galvalume material.
- ASTM A653 SS, Grade 33 (latest revision) with designation Z275 for Galvanized material.
- ASTM A653 SS, Grade 33 (latest revision) with designation Z180 or Z275 for pre-painted Galvanized material.

Vicwest Standard CORRUGATED profile, with its gentle pattern of continuous wave-like corrugations, will give a truly different face to any building surface. The corrugations, measuring only 2 11/16" from crest to crest, produce a shadow effect that is both symmetrical and attractive. For any cladding or roofing application, our Standard CORRUGATED sheet is an excellent choice.

Standard CORRUGATED Steel Cladding is available in Galvanized and pre-painted steel in standard lengths of from 4' to 32'.

Contact your nearest Vicwest office for available colors and materials.

ENGINEERING LOAD TABLES

Minimum values over 3 supports:

SPAN (INCHES)	ALLOWABLE LOAD lbs/sq. ft.	
	30 GA.	26 GA.
12	68	100
16	38	58
20	26	36
24	18	26

ESTIMATING CHART


Coverage @ 29 11/32" (0.745m) per sheet:

No. OF SHEETS	COVERAGE			No. OF SHEETS	COVERAGE			No. OF SHEETS	COVERAGE		
	FT.	INS.	M		FT.	INS.	M		FT.	INS.	M
1	2	5.33	0.745	16	39	1.28	11.920	31	75	9.23	23.094
2	4	10.66	1.490	17	41	6.61	12.665	32	78	2.56	23.840
3	7	3.99	2.335	18	43	11.94	13.410	33	80	7.89	24.584
4	9	9.32	2.980	19	46	5.27	14.155	34	83	1.22	25.330
5	12	2.65	3.725	20	48	10.60	14.900	35	85	6.55	26.074
6	14	7.98	4.470	21	51	3.93	15.645	36	87	11.88	26.819
7	17	1.31	5.215	22	53	9.26	16.390	37	90	5.21	27.564
8	19	6.64	5.960	23	56	2.59	17.135	38	92	10.54	28.309
9	21	11.97	6.705	24	58	7.92	17.880	39	95	3.87	29.054
10	24	5.30	7.450	25	61	1.25	18.625	40	97	9.20	29.800
11	26	10.63	8.195	26	63	6.58	19.370	41	100	2.53	30.544
12	29	3.96	8.940	27	65	11.91	20.115	42	102	7.86	31.290
13	31	9.29	9.685	28	68	5.24	20.860	43	105	1.19	32.034
14	34	2.62	10.430	29	70	10.57	21.604	44	107	6.52	32.780
15	36	7.95	11.174	30	73	3.90	22.350	45	109	11.85	33.524


GABLE SHEET LENGTH

To determine number of sheets required, use preceding table.

Gable End with even number of sheets.
Use ends cut off sheets to cover second gable.



Gable End with odd number of sheets.
Use ends cut off sheets to cover second gable.

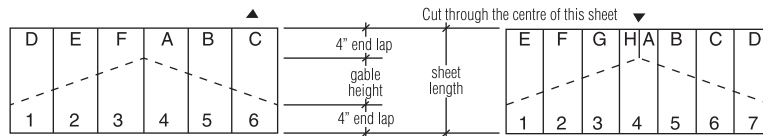

CONVERSION FACTORS

To Convert	Multiply by
Inches to millimeters	25.4
Millimeters to inches	0.03937
Feet to meters	0.3048
Meters to feet	3.281

To Convert	Multiply by
Sq. feet to sq. meters	0.0929
Sq. meters to sq. feet	10.76
Pounds to kilograms	0.4536
Kilograms to pounds	2.205



In accordance with ongoing efforts to improve our products and their performance, Vicwest Building Products reserves the right to change without notice the specifications contained herein.

The contents herein are for general information and illustrative purposes only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included in this brochure and it is believed that the information contained herein is accurate and reliable as of the date of publication. Vicwest Building Products, however, does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with Vicwest Building Products or a duly authorized representative shall be at the user's own risk. © 2015 Vicwest Building Products – All rights reserved



VW00179EN03/15